

Tafco Jalousie Vyn-Alum Vent™ for glass block openings

**The Home Owners'
Dream... beauty, efficiency
...retards condensation.**


TAFCO's Vyn-Alum Vent™ for glass block windows retards condensation and enhances the life of the window. Vyn-Alum Vent's unique structure, specifically designed for the glass block industry, combines external industrial aluminum and interior rigid, solid vinyl to provide a scientifically designed system to eliminate cold conduction which forms icing and condensation. Vyn-Alum Vent's interior framing, screen and storm sash are available in white vinyl only. Exterior framing is available in plain aluminum, painted white or painted bronze.

TAFCO jalousie vents are also available in all aluminum. Aluminum vents are available in plain aluminum finish, painted white or painted bronze.


With each TAFCO jalousie vent is a deluxe, accurately fitted insect screen. The TAFCO storm sash is equally engineered for excellence and can be quickly and easily clipped in place for winter weather protection.



To remove a damaged inner jamb without disturbing the original installation, simply take out glass slats, remove the one screw, and the inner jamb lifts out for repairs or replacement.

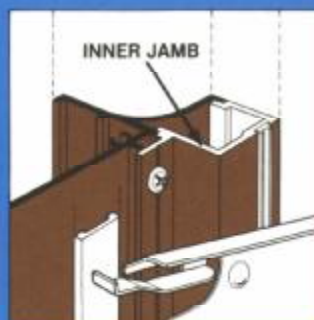

SECTION THROUGH JAMB

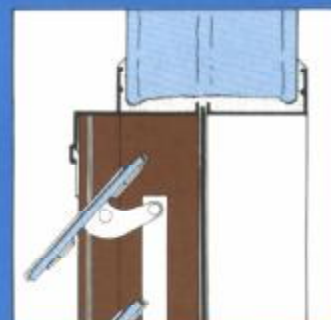

Vyn-Alum Vent™
THE WINDOW VENT SYSTEM THAT RETARDS CONDENSATION

REG. TM TAFCO CORP.

Tafco Replacement Jalousie Vents (2-part) for glass block





Features

- Insulating tape forms a thermobreak between inner and outer sections to minimize condensation.
- Ideal solution for replacing old, broken jalousie units without disturbing the glass block openings.
- Glass slats, screens and storm panels can be replaced from inside the home.
- Aluminum jalousie vents available in plain aluminum, painted white and painted bronze.

Remove old or damaged jalousie unit carefully to avoid damaging the glass block. Take out the old mechanism first then struggle with the frame. It will probably be necessary to hack-saw through each side to free it. Remove all of the old mortar as well.

Installation

1. To separate the inner and outer sections, unscrew small bolt (A) that attaches lever bar to jalousie bar. Loosen screws that hold screen brackets and actuator mechanism.
2. Slip the two sections into the opening to be sure everything fits. One from the inside and the other from the outside.
3. Remove sections and grout the bottom and sides of opening and slide outside section into opening.
4. Peel the protective paper off of the insulator tape.
5. From the inside line up the screw holes and attach screen brackets with screws to hold two sections together.
6. Screw fasten the actuator mechanism in place. The four screws will further hold.
7. Bolt the lever bar to the jalousie bar. Crank louvers open and shut to be sure jalousie works properly.
8. Work in grout to fill all openings around the edges, both inside and out. As soon as grout sets up, the jalousie window is permanently in place.

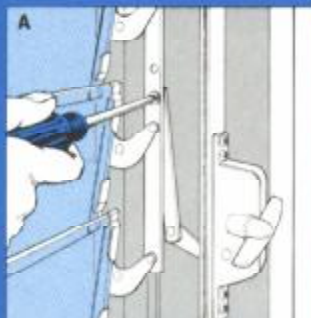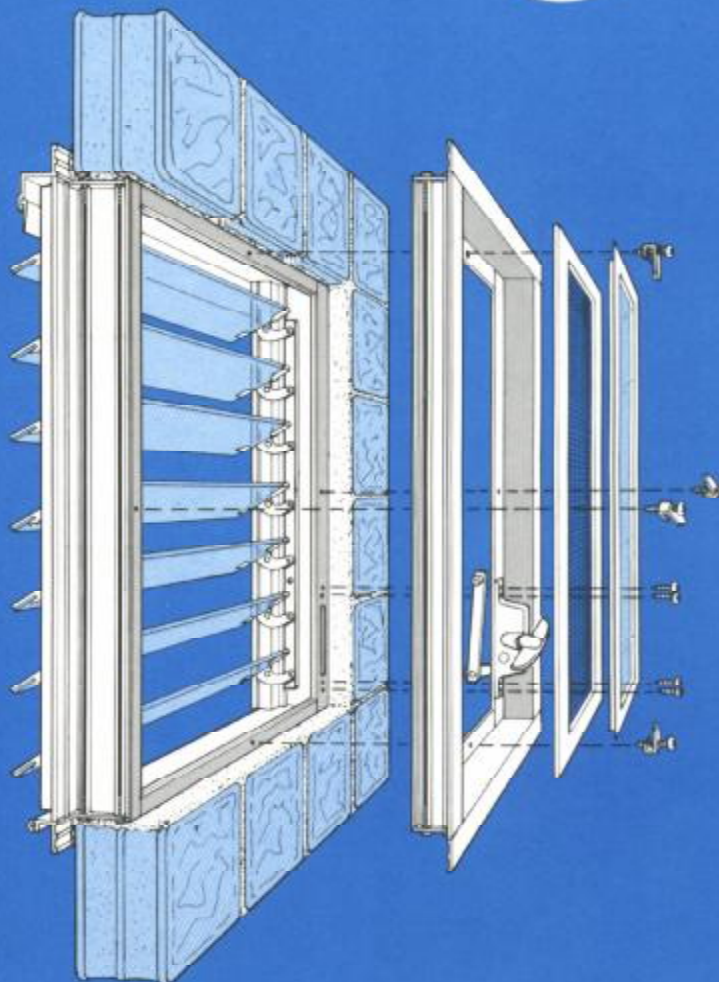

TAFCO CORPORATION

5024 North Rose Street, Schiller Park, IL 60176 • 312-678-8425